


# XSIP Series

## Ultra-Small SIP Reed Relay

### Features

- OSIP is a 10W/15W SIP relay (10.16mm x 3.81mm x 10.16mm).
- USIP is a 3W/10W SIP relay (10.16mm x 3.81mm x 6.73mm).
- VSIP is the smallest 3W/10W SIP relay (6.85mm x 3.81mm x 9.77mm).
- Magnetic shielding reduces interaction.
- Optional coil suppression diode protects coil drive circuits.
- High insulation resistance  $10^{12}\Omega$  minimum.
- High speed switching.
- Molded thermoset body on integral lead frame design.
- High reliability, hermetically sealed contacts for long life.

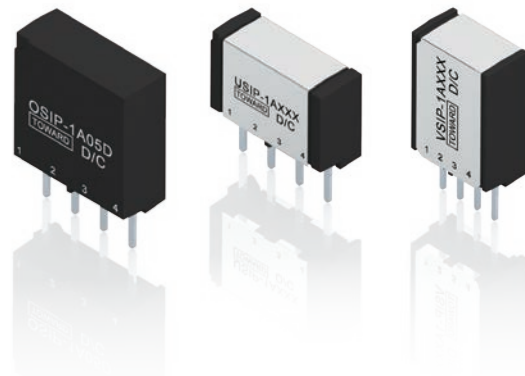

### Order Code

XSIP-1A XX X-X X  
a            b    c    d    e

- a : Model : USIP, OSIP, VSIP  
 b : Nominal Coil Voltage : 05=5V, 12=12V  
 c : Nil=Standard Type, D=Diode  
 d : Nil=Standard, I=High Power  
 e : Nil=Standard, A-Z : Special

### Coil Data-Standard Type USIP & OSIP (at 20°C )

Nominal Voltage DC $\pm 10\%$ [V]	Coil Resistance $\pm 10\%$ (ohm)	Max. Operate Voltage (VDC)	Min. Release Voltage (VDC)	Max. Allowable Voltage (VDC)
5	500	3.75	0.4	6.5
12	750	9	1	15

### Coil Data-Standard Type VSIP (at 20°C )

Nominal Voltage DC $\pm 10\%$ [V]	Coil Resistance $\pm 10\%$ (ohm)	Max. Operate Voltage (VDC)	Min. Release Voltage (VDC)	Max. Allowable Voltage (VDC)
5	400	3.75	0.5	6

### Contact Rating

Part Number	USIP / USIP-I	OSIP / OSIP-I	VSIP / VSIP-I
Contact Form	3W / 10W	10W / 15W	3W / 10W
Max. Switching Power	100V	200V	100V
Max. Switching Voltage	0.25A / 0.5A	0.5A / 1.0A	0.25A / 0.5A
Max. Switching Voltage	0.5A / 1.0A	0.5A / 1.0A	0.5A / 1.0A
Max. Switching Current	150m $\Omega$ / 200m $\Omega$	120m $\Omega$	120m $\Omega$ / 200m $\Omega$
Max. Carry Current	0.200 $\Omega$	0.200 $\Omega$	0.200 $\Omega$



**Specification**

Model	USIP / USIP-I	OSIP / OSIP-I	VSIP / VSIP-I
Operate Time (Incl. bounce-Typical)	0.35ms	0.35ms	0.2ms
Release Time (Typical)	0.1ms	0.1ms	0.1ms
Insulation Resistance	$10^{12} \Omega / 10^9 \Omega$	$10^{12} \Omega / 10^9 \Omega$	$10^{12} \Omega / 10^9 \Omega$
Dielectric Strength(Between Contacts)	200VDC / 250VDC	200VDC / 230VDC	150VDC / 250VDC
Dielectric Strength(Contacts to CIL)	1500VDC	1500VDC	1500VDC
Capacitance	(Between Open Contacts)	0.7pF	0.7pF
	(Open Contact to Coil)	1.4pF	1.4pF
Vibration (2000 Hz)	20G	20G	20G
Shock Resistance	50G	50G	50G
Operating Temperature	-20°C ~+85°C	-20°C ~+85°C	-20°C ~+85°C

**Dimensions (Unit : mm)**

